

Steering Wheel Control Interface To Suit Mitsubishi, Peugeot & Citroen

Please disconnect the module before setting up the DIP switch. DIP SWITCH - ON  OFF 

ASMB1V

Mitsubishi ASX Rockford Fosgate	2012 - 2014
Mitsubishi Lancer Rockford Fosgate	2013 - 2017
Mitsubishi Outlander Rockford Fosgate	2013 - 2019
Mitsubishi Pajero Rockford Fosgate	2012 - 2019




ASMB1C

Mitsubishi ASX Rockford Fosgate	2010 - 2014
Mitsubishi Lancer Rockford Fosgate	2007 - 2013
Mitsubishi Outlander Rockford Fosgate	2007 - 2012
Mitsubishi Pajero Rockford Fosgate	2006 - 2014
Mitsubishi Triton MN (GL-R, GLX)	2009 - 2014



ASMB2C


Citroen C4 Aircross Type B	2012 - ON
Mitsubishi ASX	2010 - 2014
Mitsubishi Lancer	2007 - 2017
Mitsubishi Mirage	2012 - ON
Mitsubishi Outlander	2007 - 2012
Mitsubishi Pajero	2006 - 2014
Mitsubishi Triton MN (GL, GLX, GLX-R)	2015 - 2016
Mitsubishi Triton Manual A/C	2016 - 2018
Peugeot 4007	2009 - 2012
Peugeot 4008	2012 - 2013



Please disconnect the module before setting up the DIP switch. DIP SWITCH - ON  OFF 


ASMB2V

Mitsubishi ASX	2012 - 2017
Mitsubishi ASX	2018 - ON
Mitsubishi Challenger	2013 - 2015
Mitsubishi Eclipse Cross	2017 - 2020
Mitsubishi Lancer	2007 - 2017
Mitsubishi Mirage	2012 - ON
Mitsubishi Outlander Standard	2013 - 2019
Mitsubishi Outlander Standard	2019 - 2021
Mitsubishi Pajero	2012 - 2019
Mitsubishi Pajero Sport Standard	2015 - 2019
Mitsubishi Pajero Sport Standard	2020 - ON
Mitsubishi Triton Auto A/C	2016 - 2018
Mitsubishi Triton Manual A/C	2016 - 2018
Mitsubishi Triton Manual A/C	2019 - 2023
Mitsubishi Triton Auto A/C Standard	2019 - 2023
Peugeot 4007	2009 - 2012
Peugeot 4008	2012 - 2013
Peugeot 4008	2014 - ON




ASMB11C

Mitsubishi Outlander Rockford Fosgate Factory 360° Camera	2013 - 2019
Mitsubishi Pajero Rockford Fosgate	2012 - 2019
Mitsubishi Pajero Sport Rockford Fosgate	2015 - 2019
Mitsubishi Triton Auto A/C With Factory 360° Camera	2019 - 2023




ASMB12C

Mitsubishi ASX Rockford Fosgate Factory 360° Camera	2018 - ON
Mitsubishi Outlander Rockford Fosgate Factory 360° Camera	2019 - 2021
Mitsubishi Pajero Sport Rockford Fosgate	2020 - ON



ASMB13C


Mitsubishi Eclipse Cross	2017 - 2020
--------------------------	-------------



Stereo Dipswitch Settings

Prior to installation, configure the four DIP switches for your specific stereo brand as shown below. Please disconnect the module before setting up the DIP switch.

Please disconnect the module before setting up the DIP switch. DIP SWITCH - ON  OFF 

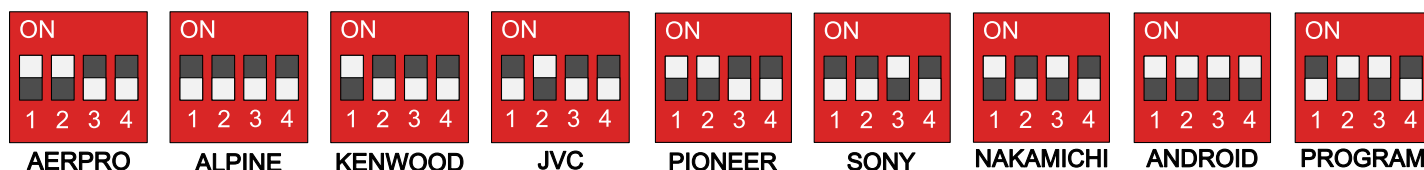

Steering Wheel Control Setup

CONNECTION OPTIONS:


Option A: (Both 8-Pin Connector & 3.5mm Jack) Aerpro AM905D, AM1005D & Pioneer DMH-AP6650BT it is recommended that both the 8-Pin connector and 3.5mm jack are connected.

Option B: (3.5mm Jack): Connect the 3.5mm jack to the female SWC jack input from headunit.

Option C: (Wired Leads): For units without a direct plug-in connect SWC Key 1, some instances will require SWC Key 2, and SWC GND also.

Option D: (8-Pin Connector): Connect the 8-pin plug to the SWC input only for Nakamichi, Android Headunits & Alpine INE-AW409S, INE-AX809

IMPORTANT NOTE: Unless otherwise stated most headunits only require one connection for SWC retention.

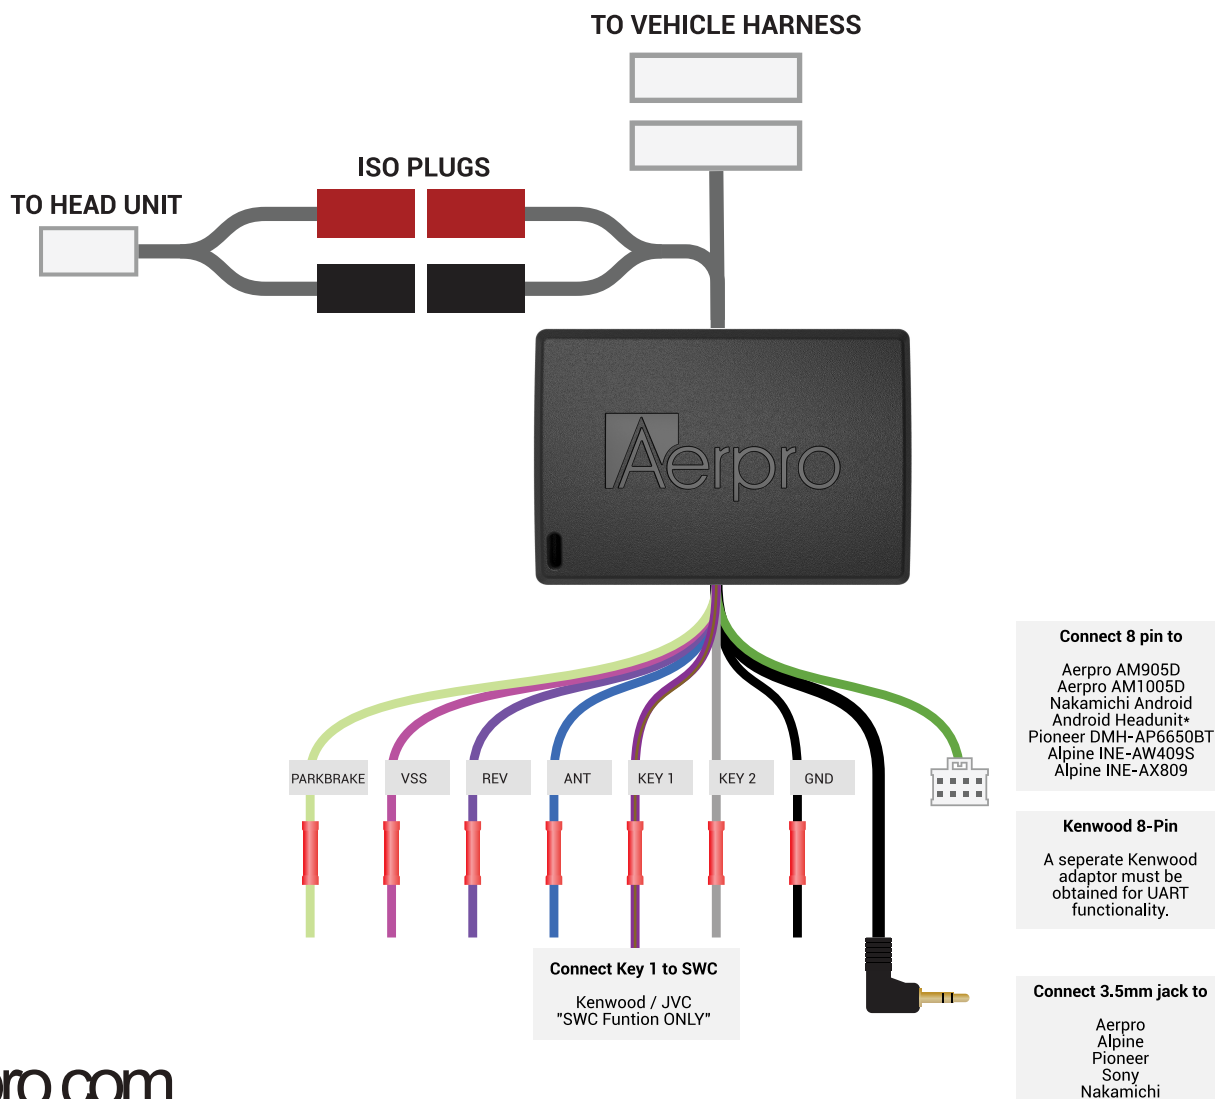

Steering Wheel Control Configuration

Aerpro: AM905D, AM1005D

1. 3.5mm Jack: DIP switches: 1-ON, 2-ON, 3-OFF, 4-OFF. Go to Settings → Steering Wheel Control → With Adapter.
2. 8-pin Adapter: Reset unit → Select Hiworld → Select vehicle type → Program SWC according to screen. (Displays factory info; check Pioneer website for compatibility).

Alpine: Operate directly.

JVC: Operate directly.

Kenwood: Operate directly.

Nakamichi: Presets: NA3615 (W7, W9, WX, M9, MX), NA3510-M7, NA3625 (W6, WUX).

Pioneer: Settings → Steering Wheel Control → With Adapter.

Pioneer DMH-AP6650BT: (Two setup methods)

1. 3.5mm Jack: DIP switches: 1-ON, 2-ON, 3-OFF, 4-OFF. Go to Settings → Steering Wheel Control → With Adapter.
2. 8-pin Adapter: Reset unit → Select Hiworld → Select vehicle type → Program SWC according to screen. (Displays factory info; check Pioneer website for compatibility).

Sony: Settings → General → Steering Control → Preset.

If Preset does not work use Custom: If preset fails, set DIP to 1-OFF, 2-ON, 3-ON, 4-OFF.

Android Headunit: (Inc. Alpine INE-AW409S, AX809; Nakamichi Android)

Connect 8-pin (CANBUS) or Key 1, Key 2, GND.

With CANBUS: DIP Switch to Android → Factory Settings.

- Alpine: Password 1967.
- Nakamichi: Password 1948 → Select Hiworld as provider → Choose vehicle type.

Without CANBUS: DIP Switch to Program → Select SWC Learning in stereo menu.

Technical Support

If you need assistance setting up or using your Aerpro product now or in the future, call Aerpro Support Australia **TEL: 03 8587 8889** MON-FRI 9AM – 5PM AEST. If you would like to download a digital copy of this manual, or other Aerpro manuals/software, please visit the <http://aerpro.com> website.