


CAVW04

Infodapter Interface for Volkswagen Vehicles

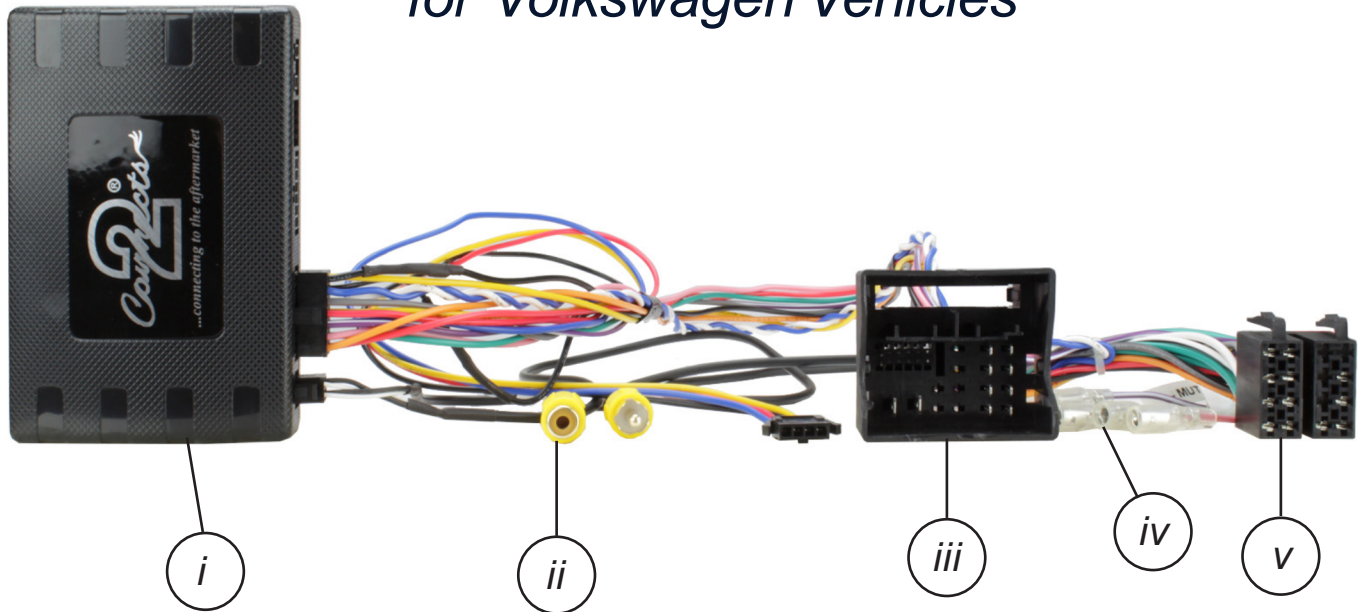

i. Interface Box

ii. Video/Camera RCA (Yellow)

iii. Quadlock Connector

iv. Additional Outputs

v. ISO Power/Speaker Connector

Designed and
Engineered
in the UK. 

APPLICATION

Note: Application data is subject to change at any time

| | | | |
|-----------------------------|-----------|------------------|---------|
| Volkswagen Crafter | 2017-UP | Volkswagen Polo | 2017-UP |
| Volkswagen Grand California | 2016-2019 | Volkswagen Nivus | 2020-UP |
| Volkswagen Touran (5T) | 2016-UP | Volkswagen Taigo | 2021-UP |
| Volkswagen Golf | 2013-UP | MAN TGE | 2017-UP |

For vehicles with MIB II systems

FEATURES

- Retains Steering Wheel Control Functionality
- Retains Phone Button Functionality
- Retains Vehicle Settings and Generates Settings Menus
- Provides Optional Input for Aftermarket Reversing Camera
- Retains Parking Sensor Audio and Generates Parking Sensor Graphics
- Provides Outputs for Park Brake, Reverse Gear, Speed Pulse and Mute
- Software Updatable (*contact supplier for more information*)

DISCLAIMER

The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s. This instruction manual is based on documented data and research. The manufacturer of this product cannot be held responsible for any changes made to the vehicle by the manufacturer or damages that may occur through the installation of this product in accordance with the steps outlined herein.

PRODUCT INFORMATION

The **CAVW04** interface aids the installation of an aftermarket head unit into an OEM dashboard. This interface helps retain steering wheel control presets as well as retaining vital features and functions which include the reverse camera and parking sensors (*if applicable*).

Note: This product is for vehicles with MIB II systems only. Features related to "Connected Car" - which include E-Call and We Connect - and the towing alarm are not actively retained, they may however have limited functionality within the background. For vehicles with SOS/Service/Info buttons, it is recommended to get these functions factory coded out by an approved dealership prior to installation to avoid any diagnostic issues on the MFD.

! Please be aware that whilst we retain most of the original vehicle feature with our interfaces, some features may be lost. As we continue our research, this product may be updated and improved to support more OEM functionality.

WIRING KEY

IN ISO CONNECTOR


| | | | |
|--------------|-----------------------|--------|---------------|
| Purple | Right Rear Speaker + | Yellow | Permanent 12V |
| Purple/Black | Right Rear Speaker - | Black | Ground |
| Green | Left Rear Speaker + | Red | Ignition 12V |
| Green/Black | Left Rear Speaker - | Orange | Illumination |
| Grey | Right Front Speaker + | | |
| Grey/Black | Right Front Speaker - | | |
| White | Left Front Speaker + | | |
| White/Black | Left Front Speaker - | | |

ADDITIONAL CONNECTIONS

| | | | |
|--------------|--------------|---------------------|----------------------------|
| Pink | Speed Pulse | Yellow RCA (Male) | Infodapter Video |
| Green | Park Brake | Yellow RCA (Female) | Connect Aftermarket Camera |
| Purple/White | Reverse Gear | | |
| Grey | Mute | | |

INTERFACE CONNECTIONS

- ① Reverse Camera Extension Harness Input
- ② Power Harness Input
- ③ Head Unit Connection (Patch) Lead Input
- ④ DIP Switch 1 - 'ON' for Pioneer, 'OFF' for other brand head units.
DIP Switch 2 - 'ON' for PAL reversing camera, 'OFF' for NTSC reversing camera (Default is 'OFF'/NTSC).
DIP Switch 3 - Change from 'OFF' to 'ON' and back to reset screen settings to factory defaults.
Note: During this procedure, the screen background will change to red and no settings adjustments can be made.
DIP Switch 4 - Not Used.
- ⑤ Not used

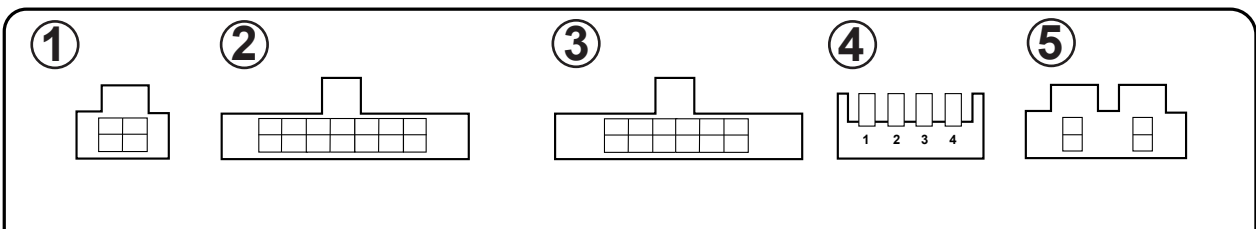

PRIOR TO INSTALLATION

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are used during the installation to avoid damage to the vehicle or product. Connects2 can not be held responsible for the installation of this product.

INSTALLATION GUIDE

See Wiring Diagram on Pg.4 for more information

Before installing the interface, the factory stereo must be removed and disconnected. To do this, please consult the vehicle owner's manual/handbook or contact a fitting professional.

A stereo connection (patch) lead is also required for the installation of this interface (supplied separately). Please ensure that you have the correct lead before proceeding. For universal patch leads, prepare the wiring loops in accordance with the instruction manual supplied with the product before installation.

1. Connect the 12 Pin connector from the stereo connection (patch) lead to the interface box.
2. Connect the opposite end of the stereo connection (patch) lead to the steering wheel control input on the back of the aftermarket stereo.

NOTE: This may be a 3.5mm jack connector or a wired input depending on the brand of aftermarket stereo being fitted. Please consult the aftermarket stereo installation manual for further information on where to make the connection.


! IMPORTANT: THIS STEP MUST BE COMPLETED BEFORE CONNECTING POWER TO THE INTERFACE. FAILURE TO DO SO MAY RESULT IN A LACK OF FUNCTIONALITY AND THE NEED TO REINSTALL THE PRODUCT

3. Connect the 14 Pin connector from the supplied wiring loom to the interface box.
 4. Connect 4 Pin camera extension harness to the interface box.
 5. Connect the power/speaker ISO connector to the power/speaker ISO connector at the rear of the aftermarket stereo.
 6. Connect any additional outputs from the main wiring harness to the head unit.
See 'Additional Connections' on Page 2 for more information.
 7. Connect the male yellow RCA to the reverse camera input of the aftermarket head unit.
 8. To connect an aftermarket reversing camera, connect the female yellow RCA from the camera extension harness to the male yellow RCA of the camera.
- Note: Ensure that the 'Camera Connected' option in the Preferences menu is set to 'Yes' for the camera to function correctly.*
9. Connect the quadlock connector on the supplied harness to the quadlock connector from the vehicle.
 10. Test stereo and steering wheel control functionality for correct operation before reassembling the vehicle dashboard. If Infodapter functions are unresponsive, please uninstall the interface and wiring and reinstall carefully in accordance with the above steps.

Technical Support

If you need assistance setting up or using your Aerpro product now or in the future, call Aerpro Support Australia
TEL: 03 – 8587 8898 FAX: 03 – 8587 8866 Mon-Fri 9am – 5pm AEST. If you would like to download a digital copy of this manual, or other Aerpro manuals/software, please visit the <http://aerpro.com> website.

WIRING DIAGRAM

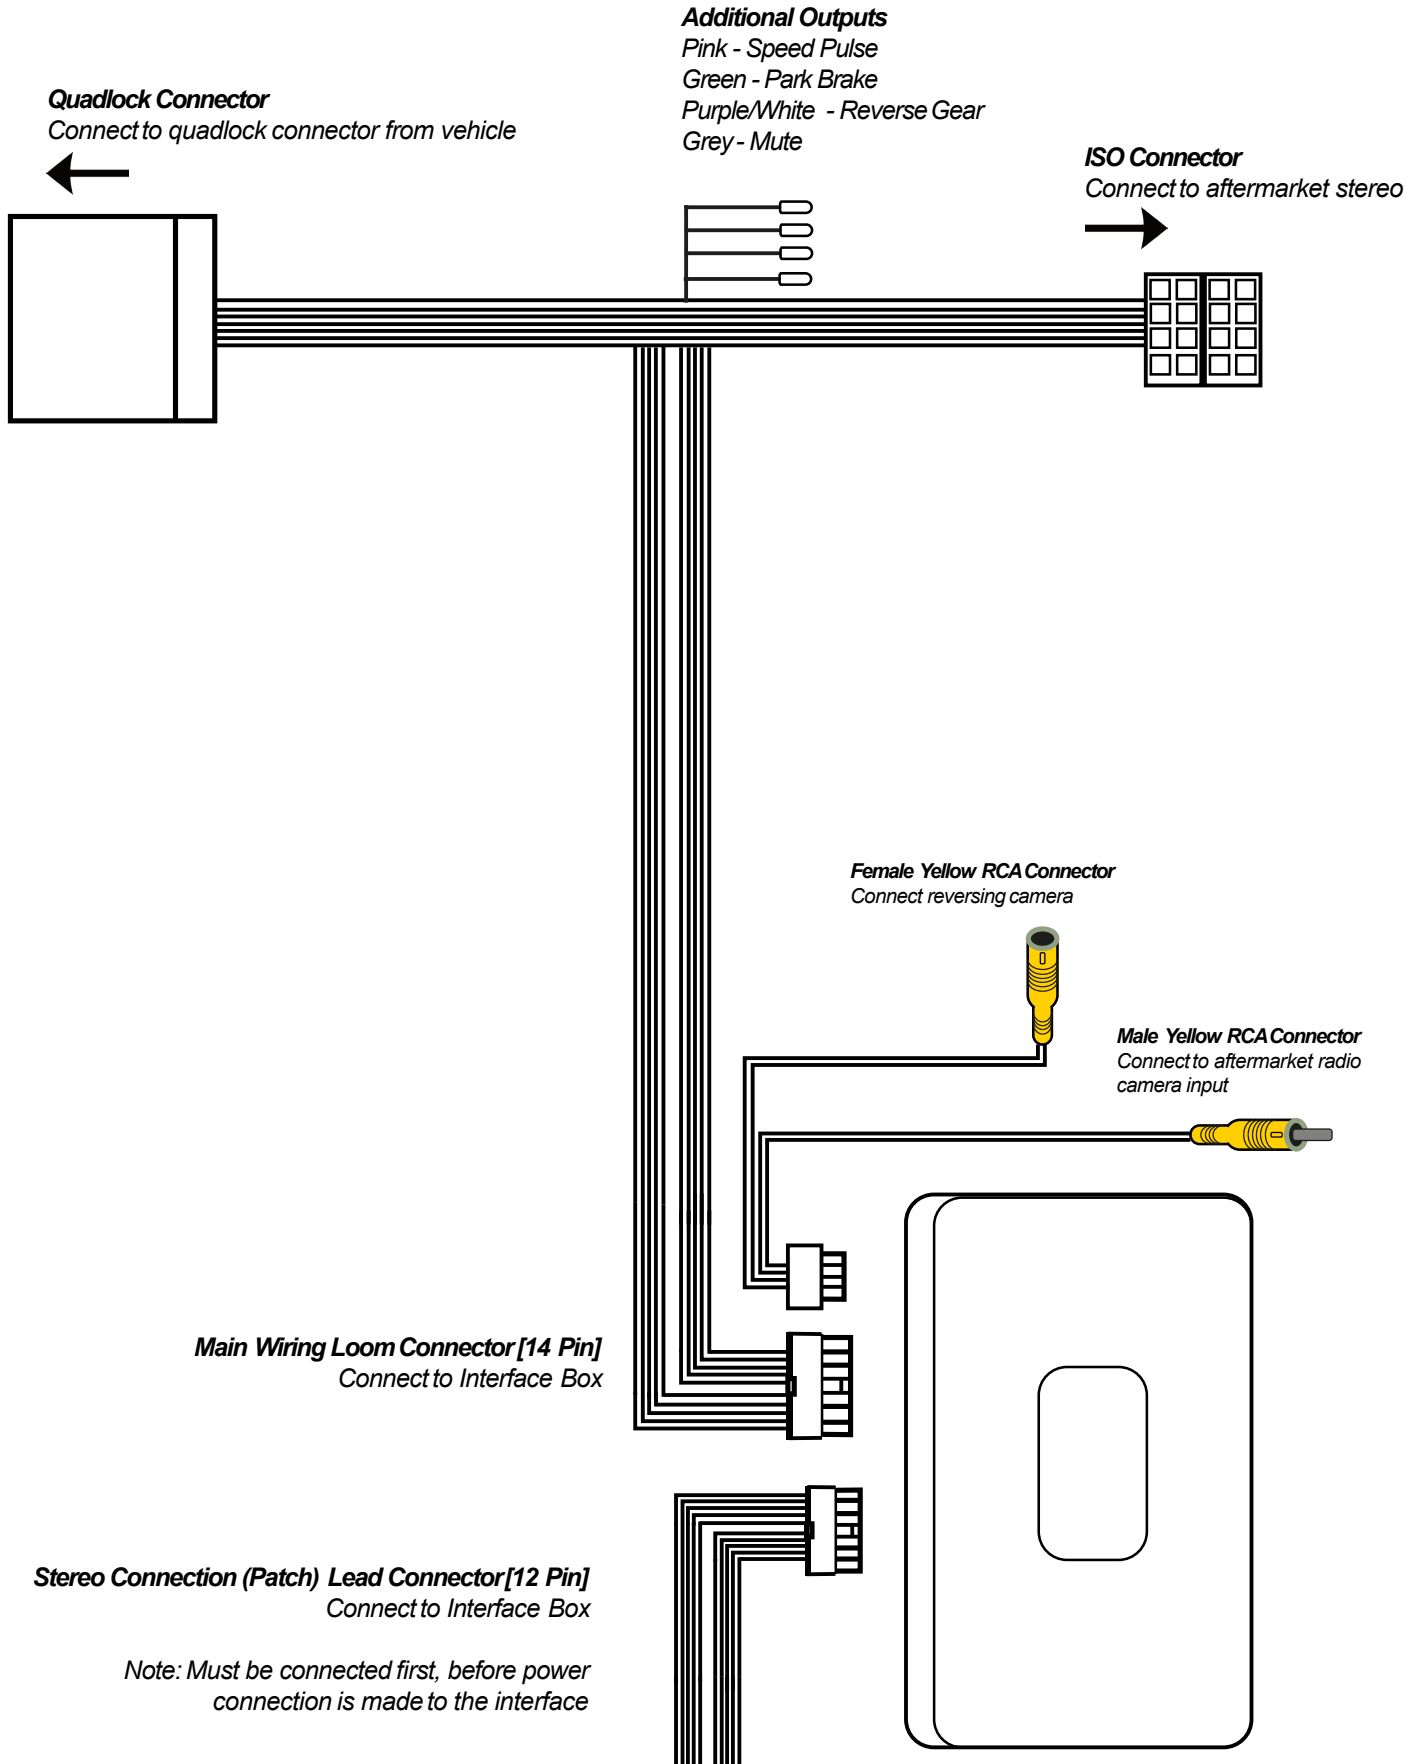


USERGUIDE

EXAMPLE STEERING WHEEL CONTROL DIAGRAMS

The following diagrams, though based on careful research, is an example only. Individual steering wheel control configurations may differ.

The Infodapter will retain several of the vehicle's original steering wheel control functions including moving up and down between tracks, adjusting the volume and picking up or hanging up calls.

In addition to this functionality, the vehicle's steering wheel controls are also used to enter, exit and navigate the Infodapter menus. An example configuration can be seen below:

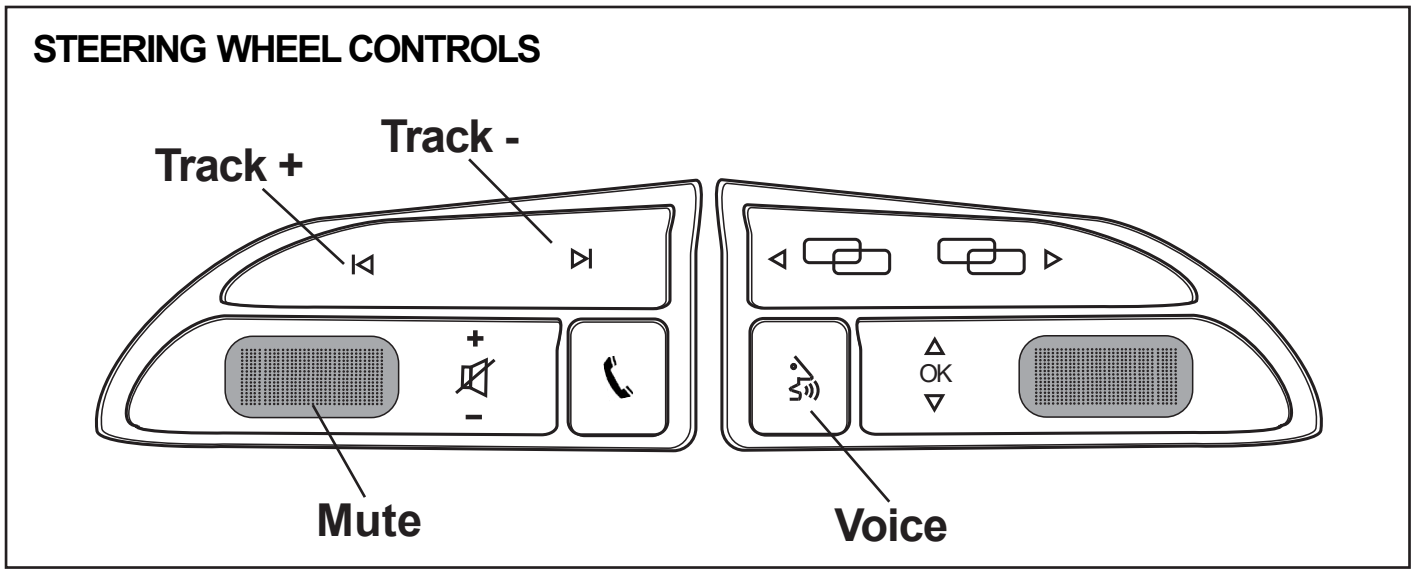

Steering wheel control configuration

Five (5) presses of MUTE or VOICE button to enter the configuration menu.

Phone Control

Press MUTE or VOICE once to pick up.

Press MUTE or VOICE twice to hang up.

Hold MUTE or VOICE to activate voice control.

USERGUIDE

Navigating the Infodapter Menus

Short press MUTE or VOICE to enter a sub-menu or confirm an option within a menu.
Long press MUTE or VOICE to return to the previous menu.
Press TRACK + to scroll up through the menu items, or to increment an option within a menu.
Press TRACK - to scroll down through the menu item, or to decrement an option within a menu.

Exiting the Configuration (Main) Menu

Press and hold the MUTE or VOICE button whilst in the top level Configuration Menu to exit the Infodapter menu system and return to standard stereo operation.

DrivingMode



The driving mode button can be used as normal. The graphic for the mode will be shown on the head unit display.

Park Assist



The park assist button can be used as normal to activate or deactivate park assist. The graphic will be shown on the head unit display.


Reverse Priority Display

Select between reverse camera image or parking radar with one press of the VOICE button while reversing.

Note: this option is only available when 'Camera Connected' is set to YES in the preferences menu.





Press VOICE Once

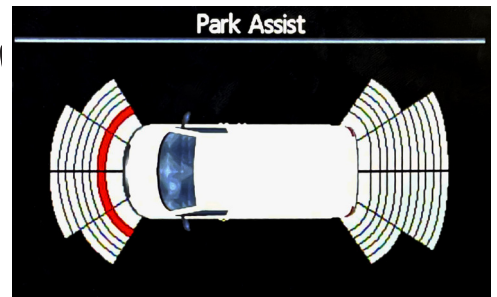

CONFIGURATION MENU

Five (5) presses of the MUTE or VOICE buttons to enter the Infodapter Configuration menu and navigate through the various options and settings below:

ENTER MENU

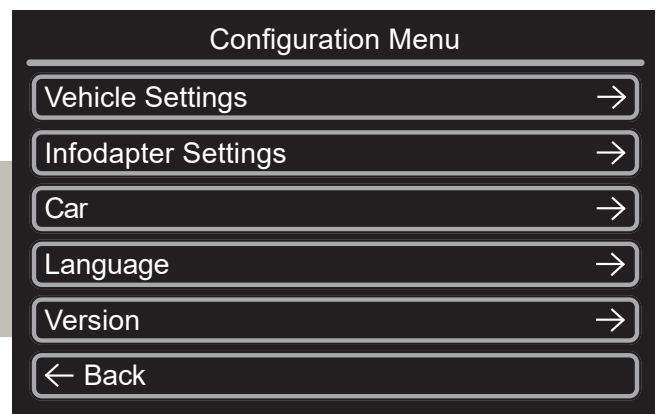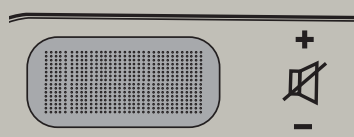


VEHICLE SETTINGS

The Infodapter interface retains the ability to adjust vehicle settings that were present when the original head unit was installed.

The options available will depend on the individual vehicle and system specification. These might include lights, locks, mirrors, time & date and much more.

See the vehicle handbook for more information regarding these features and how they operate.

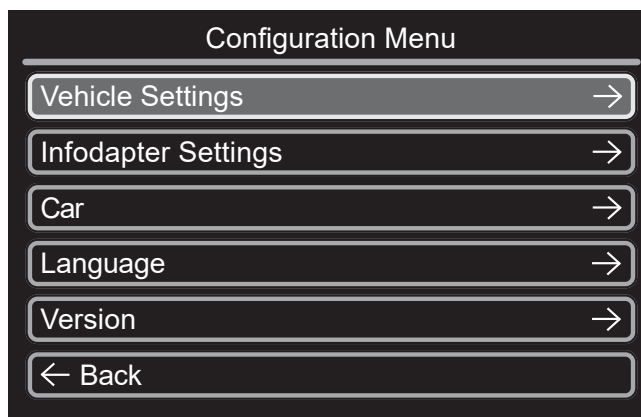

INFODAPTER SETTINGS

Screen Size/Position


Change horizontal and vertical screen size/position to align the Infodapter with the aftermarket display.

Picture Settings

Adjust the brightness, contrast and colour saturation.

Preferences

Change options based on vehicle functionality and specification.

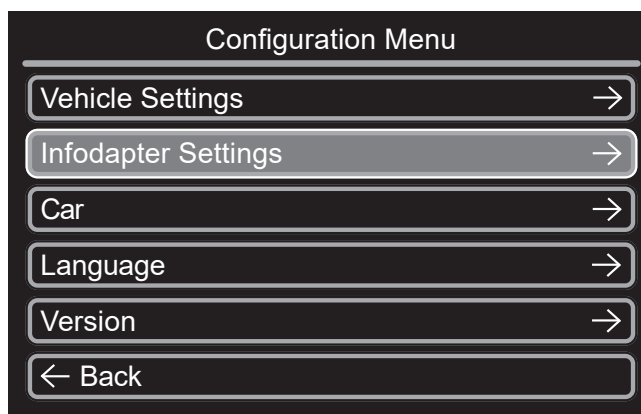

PREFERENCES(SUB-MENU)

Driver Position

Select Left or Right depending upon whether the vehicle is left or right-hand drive.

Camera Connected

Select Yes if an optional camera is connected.

Reverse Priority


Select whether camera or park assist image is shown by default when reversing.

Park Brake Source

Set Park Brake output to activate when park brake is on (Park), when speed is less than 3km/h (Speed) or to remain on at all times (Always On).

Climate

Select how long the climate display will be shown on the head unit when adjusted. Selectable range is between 0 (disabled) and 30 seconds.

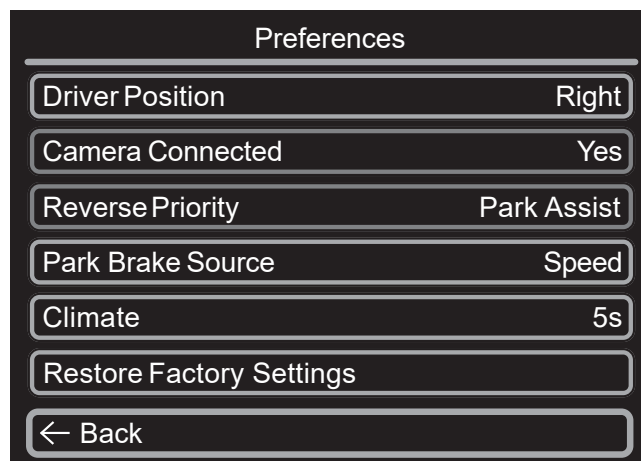

CONFIGURATION MENU

PREFERENCES(SUB-MENU) CONTINUED

Restore Factory Settings

Restores all Infodapter settings to factory defaults.

Note: this does not restore vehicle settings to defaults.

Climate Control Type

Select Manual or Automatic

Set this to the appropriate HVAC type in the vehicle.

If the vehicle has manual climate controls, then the

Climate timeout will be hidden.

Parking Radar Image

Select Van or Car

Set this to display the appropriate vehicle image on the parking radar.

CAR

Access the vehicle's trip computer and view data including distance travelled, fuel consumption etc.

LANGUAGE

Select language (English/French/German/etc).

VERSION

View software version screen.

