

QUICK REFERENCE GUIDE

TO SUIT FALCON

BA-BF

& TERRITORY


SX-SY

Inclusions

- 1 x Double DIN facia kit
- 1 x Built-in HVAC and steering wheel control unit
- 1 x Main wiring harness
- 1 x Universal SWC patch lead
- 1 x Video in/out lead
- 1 x Mounting kit
- 4 x M6 Bolts
- 1 x User/Install manual



Product Structure

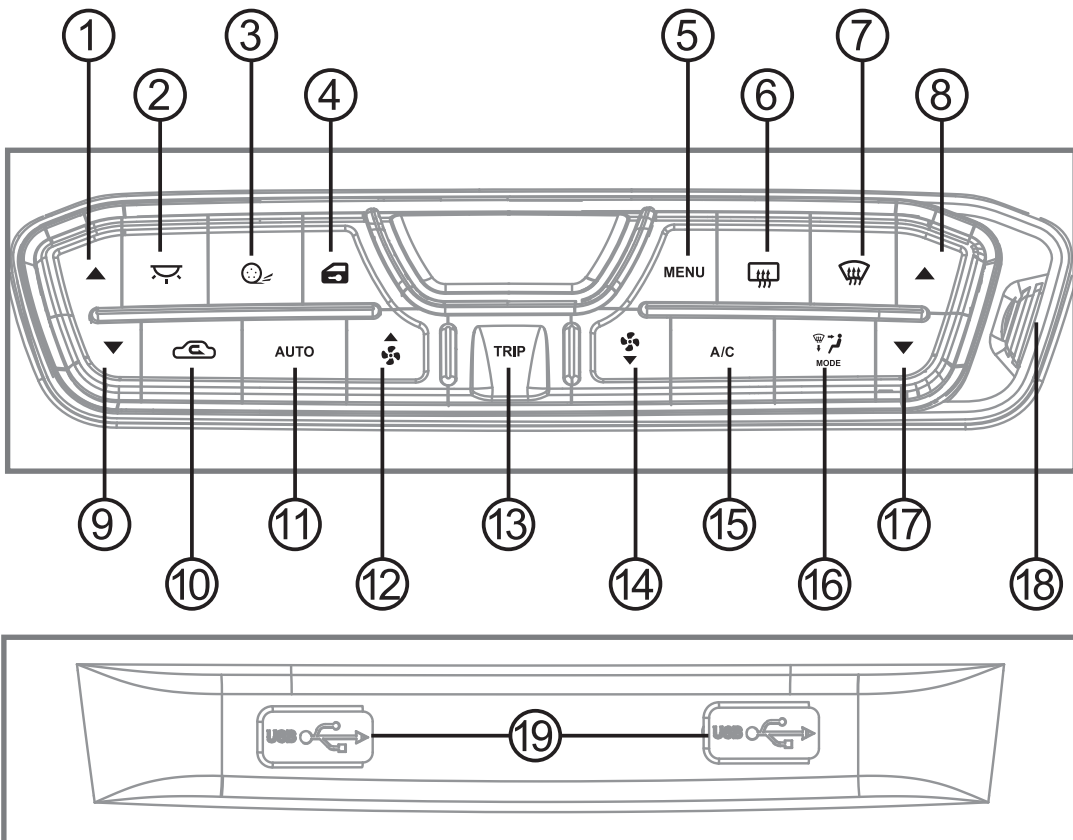

1. Temperature UP
(Passenger side)

2. Interior light

3. Traction control

4. Auto door lock

5. System menu

6. Rear demister

7. Front demister

8. Temperature UP
(Drivers side)

9. Temperature DOWN
(Passenger side)

10. Air circulation

11. Auto climate control
(Dual Zone)

12. Fan speed UP/ Menu
Navigation

13. Trip computer

14. Fan speed DOWN/ Menu
Navigation

15. Air conditioner ON/OFF


16. Mode

17. Temperature DOWN
(Drivers side)


18. Temperature Sensor

19. USB passthrough
(headunit dependant)

Wiring diagram

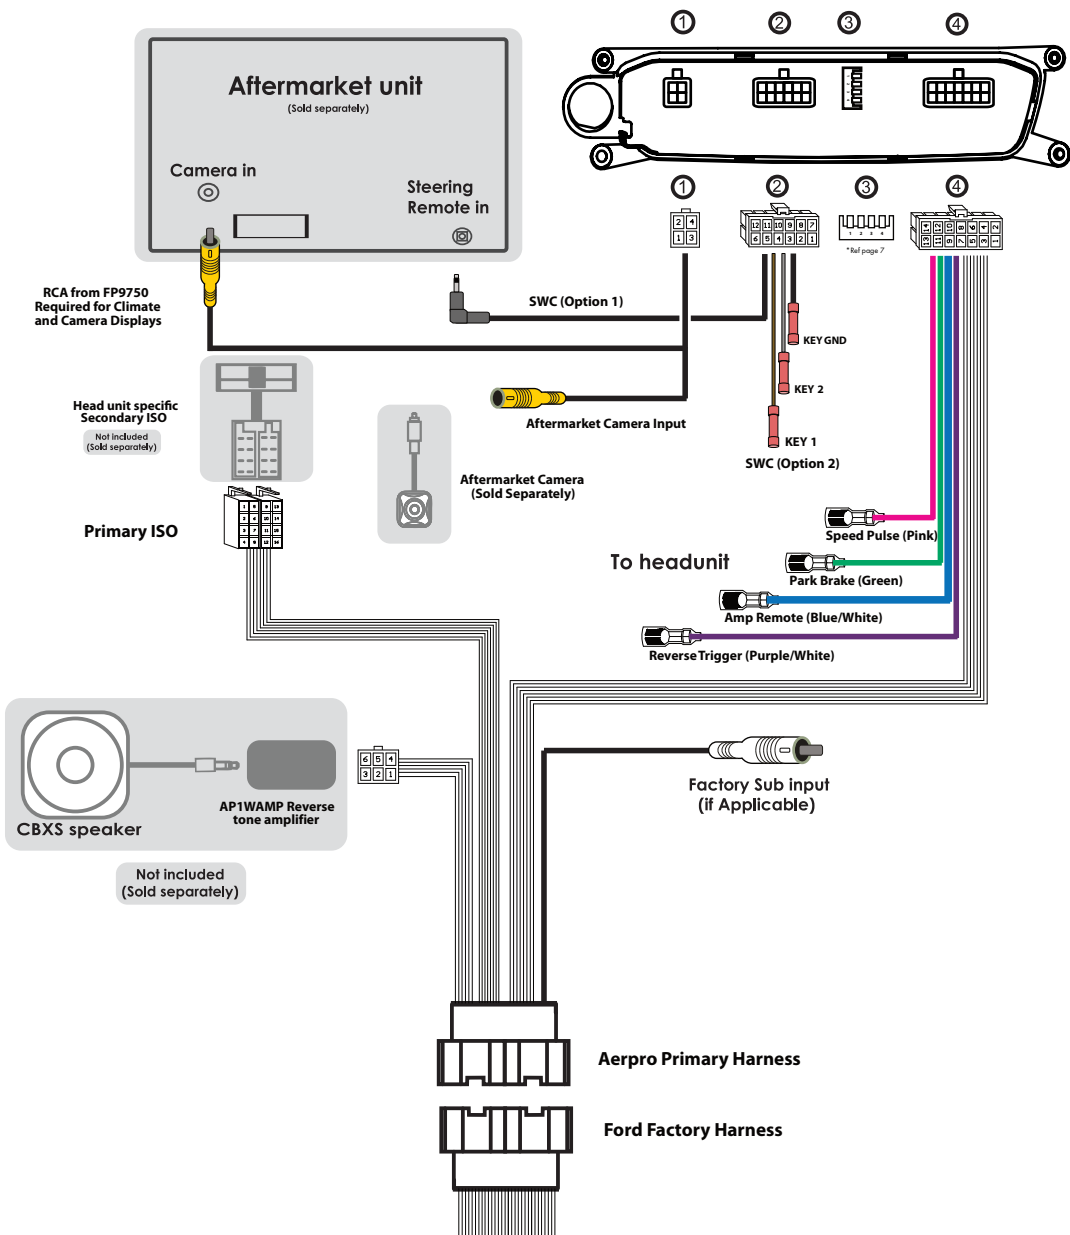

SINGLE WIRE INPUT



Radios such as Kenwood, JVC and Grundig have single wire input. Use this connection first and cut loops accordingly. Ensure the Radio manual is checked for this cable before proceeding.

LEARNING RADIOS




Radios with 3 wire learning will require all three Key wires connected, then programmed in the radios menu. Check Radio manual for before proceeding.

3.5MM JACK INPUT



Radios with a jack input ONLY, such as Sony and Pioneer will utilise this connection. Some learning radios will use this connection for programming, these radios should have all coloured loops connected.

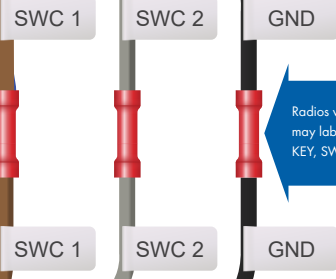

Radios with 3 wire systems may label wires differently. KEY, SWC, Remote ETC.

APUNIPL2



Radios with multiple connections, ie Jack and wire input, only use one connection. For more detailed instructions, please follow the QR code.

Always remember to insulate any unused connections



Aerpro, Sony, Pioneer & Other Radios with Learning Ability
No Loops Cut



Alpine
Cut Green



Clarion
Cut Purple



JVC
Cut Purple & Green



Grundig, Philips, Nakamichi
Cut Purple & Orange



Kenwood
Cut Green & Orange

FAQ Troubleshooting

Q: Why does my climate not display on my aftermarket unit?

A: The Aerpro facia uses the reverse camera input and trigger on your aftermarket unit to display all information, such as HVAC, menus, reversing camera (if applicable). Make sure you have the male RCA and purple/white trigger wire from the FP9750 connected. Do not introduce another reverse trigger to the system. The trigger directly from the FP9750 loom must be used.

Also you may need to turn on a reverse camera setting within the head unit being fitted. (See Manual page 2-30)

Q: Why does 'Reverse' trigger my aftermarket radio, but no reversing image is displayed?

A: The reversing camera requires activation within the installer menu of the FP9750 kit. (Pages 17 & 18)

Q: Why does the fan on the facia not turn off when I lock my car.

A: There is a small fan on the rear of the facia, it will stay on for a few minutes after the car has been turned off and locked.

Q: Why does my factory dual zone climate only function as single zone after installation?

A: You need to change the AIR CON TYPE setting within the installer menu of the FP9750 kit from single (default) to dual. (Page 17)

Q: Why do my steering wheel controls (SWC) not work?

A: The included patch lead is an APUNIPL2, a universal patch lead to suit most aftermarket head units.


As the APUNIPL2 is a universal product make sure you have this configured to suit your brand of unit.

(APUNIPL2 guide in this booklet, also Page 2-31)

*For further and more detailed instructions, please refer to our online manual.

Page 4 reference 3

Up = Off, Down = On



- 1:** On = Pioneer head units. Off = All other brand head units
- 2:** Settings for reverse camera. On = PAL, Off = NTSC. The default setting is OFF.
- 3:** Resets the display settings back to default. If the display settings have been manipulated in a way that is no longer possible to make adjustments, change DIPswitch #3 from Off to On and back. This will reset the screen settings to the factory defaults. During this procedure the screen background will change to red. While the background is red, no settings can be made.
- 4:** Not applicable. (This should be kept in the Up/Off position)

Product and Install Information

If you would like to find more information on this product or download an up to date digital copy of this manual, please visit the <https://aerpro.com> website and search for your model or scan the QR code below.

<https://aerpro.com/FP9750>



An installation and setup video is also available on our site



Technical assistance

If you need assistance setting up or using your Aerpro product now or in the future, call Aerpro Support. Australia

TEL: 03 – 8587 8888

Mon-Fri 9am – 5pm AEST



Please retain this QUICK REFERENCE GUIDE for future assistance.

If you would like to find more information on this product or download a digital copy of this manual, please visit the <https://aerpro.com> website and search for your model. An installation video is also available on our site.

This manual is considered correct at time of printing but is subject to change. For latest manuals and updates refer to the website.

Copyright © 2021 by TDJ Australia

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, copying or other electronic or mechanical methods, without the prior written permission of the author.