

APTO53HS

REAR ENTERTAINMENT RETENTION HARNESS

to suit **TOYOTA LANDCRUISER 200 SERIES SAHARA 2016-2021**

This harness is used to retain the rear entertainment in conjunction with the AMUTO53 advanced infotainment system.



To access the factory amplifier's main connector

Slide the front passenger seat to the rear most position and remove the seat rail front covers.



Unbolt the 2 x 14mm seat retention bolts, then slide the seat to the most forward position.



To access the factory amplifier's main connector (continued)

Remove the rear seat rail covers and unbolt the 2 x 14mm seat retention bolts.



Once all bolts are removed tilt the passenger's seat back and lean on the rear seat.
Note: No need to remove the seat from the vehicle. Factory amplifier is under carpet.



Remove scuff panel

Remove the front passenger scuff panel, kick trim and dash side panel.



Note: The scuff panel is illuminated and needs to be unplugged.




Connecting the APT053HS

Unclip the carpet retention fasteners to allow easy access under the carpet to run harness



Locate and disconnect the main factory amplifier plug. Push on black lever and pull.

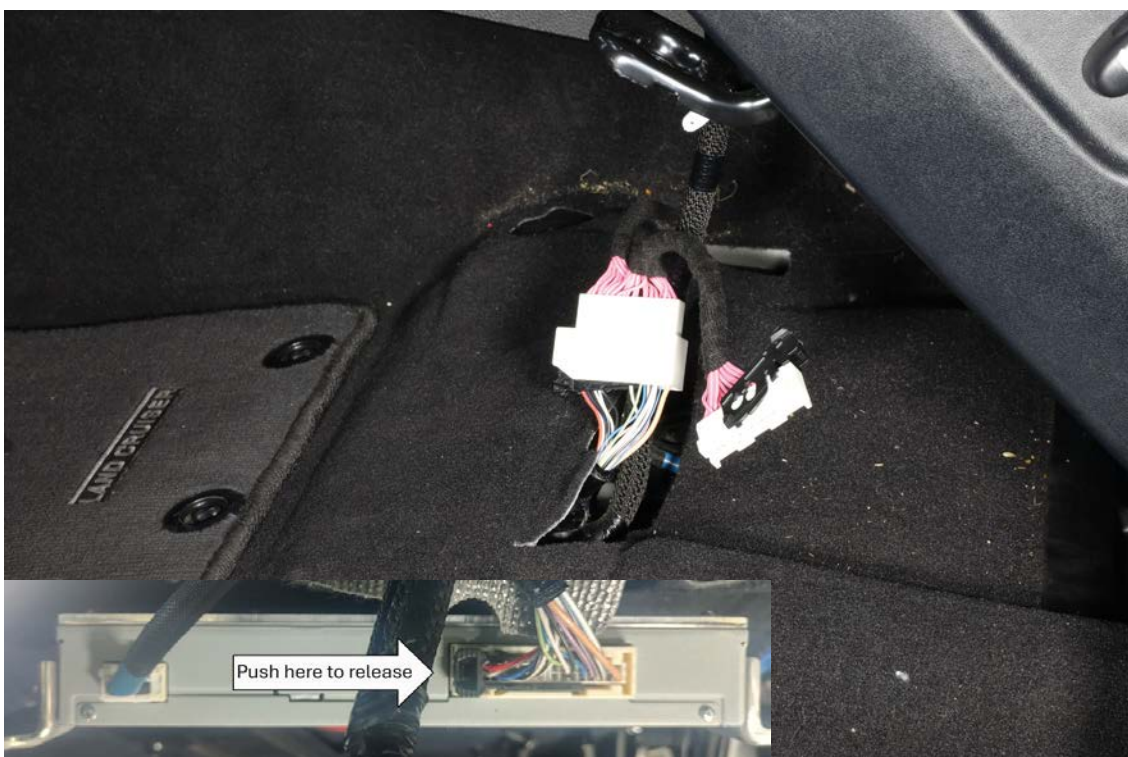


Run harness from amplifier to AMUTO53

Feed the harness under the carpet and up the side of the centre console to the rear of the radio position.



Connect the ISO connectors from harness to AMUTO53

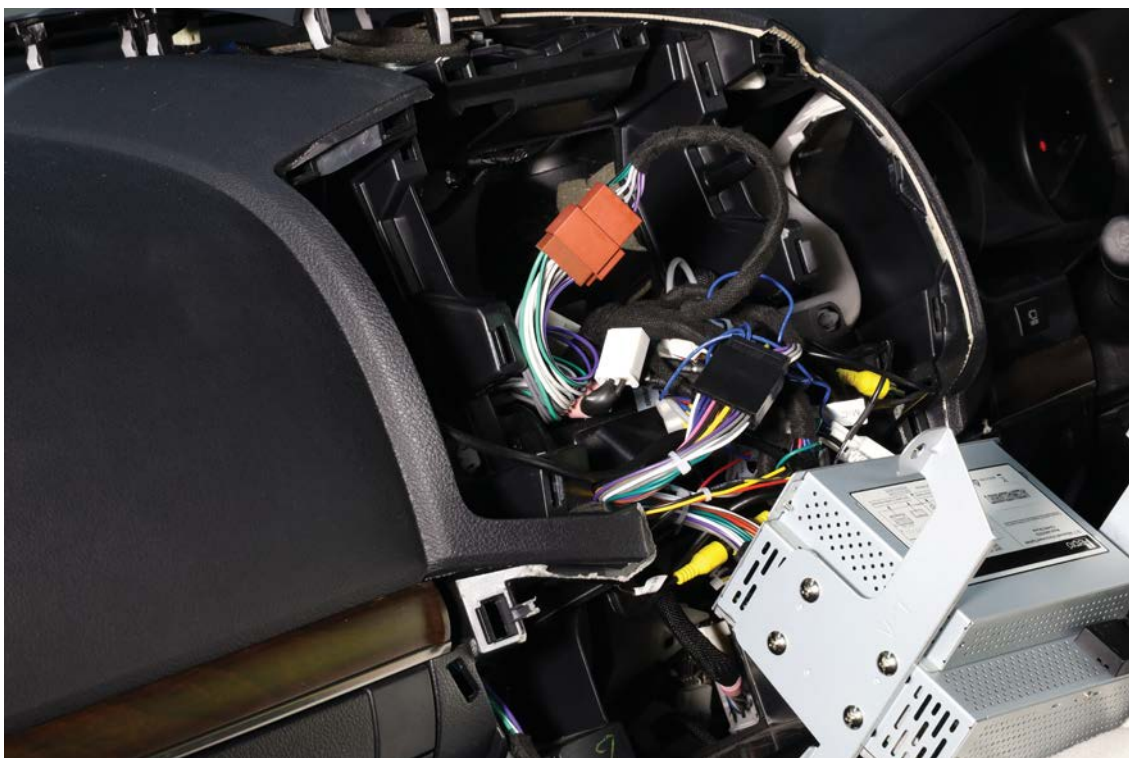

Reinstall factory connectors, enable settings

Connect the BROWN LVDS and the WHITE MOST vehicle plugs into the factory unit



Be sure to switch off the **Use Factory Amplifier** setting.
This allows access to more detail audio settings, refer to **Settings-Audio** of AMUTO53 Manual.

